

SF-7506NA (Neodymium)

3 in COMPRESSION DRIVER



KEY FEATURES

110W AES Power Handling
1.5" horn throat diameter
75mm(3 in) aluminium voice coil
Titanium diaphragm
950–18000 Hz response
105 dB sensitivity





SPECIFICATIONS

Nominal Impedance	8 Ω
Minimum Impedance	6.5 Ω
Power handling(AES)	110 W
Sensitivity @1w/1m	105 dB
Throat Diameter	36 mm (1.4 in)
Frequency Range	0.95—18KHz
Recommended crossover	1.5KHZ
Voice Coil Diameter	75mm (3in)
Winding Material	Aluminium
Diaphragm Material	Titanium
Flux Density	2.65T $\pm$ 0.1T
Magnet Material	Neodymium Ring
Overall Diameter	131mm
Overall Depth	60mm
Net Weight (1 unit)	2.25Kg

MOUNTING AND SHIPPING INFORMATION

Mounting Holes	P76 x M6 x 2
Overall Diameter	131mm
Depth	60 mm
Net Weight (1 unit)	2.25kg
Shipping Weight (4 units)	9 kg
Shipping Box (4 units)	315x170x150 mm

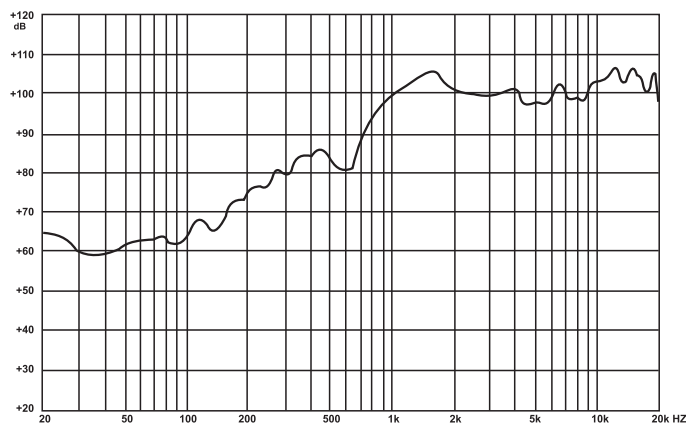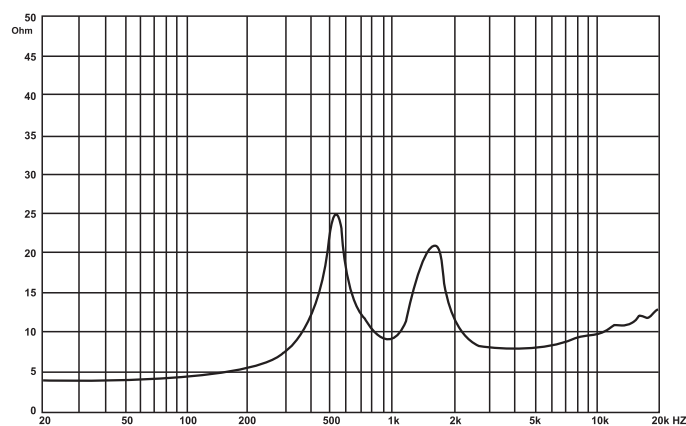

NOTE:

(1) 2 Hours Test According to AES 2–1984 Rev. 2003

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.