

SF-7505A

3 in COMPRESSION DRIVER



KEY FEATURES

105W AES Power Handling
1.5" horn throat diameter
75mm(3 in) aluminium voice coil
Titanium diaphragm
950–18000 Hz response
102 dB sensitivity





SPECIFICATIONS

Nominal Impedance	8 Ω
Minimum Impedance	6.5 Ω
Power handling(AES)	105 W
Sensitivity @1w/1m	102 dB
Throat Diameter	36 mm (1.4 in)
Frequency Range	0.95—18KHz
Recommended crossover	1.5KHZ
Voice Coil Diameter	75mm (3in)
Winding Material	Aluminium
Diaphragm Material	Titanium
Flux Density	2.1T \pm 0.1T
Magnet Material	Ceramic Ring
Overall Diameter	170mm
Overall Depth	72mm
Net Weight (1 unit)	4.7Kg

MOUNTING AND SHIPPING INFORMATION

Mounting Holes	P76 x M6 x 2
Overall Diameter	170mm
Depth	72 mm
Net Weight (1 unit)	4.7 kg
Shipping Weight (4 units)	20 kg
Shipping Box (4 units)	380x200x180 mm

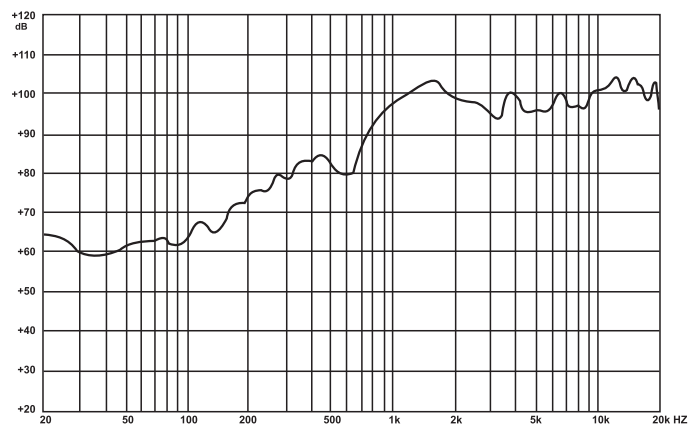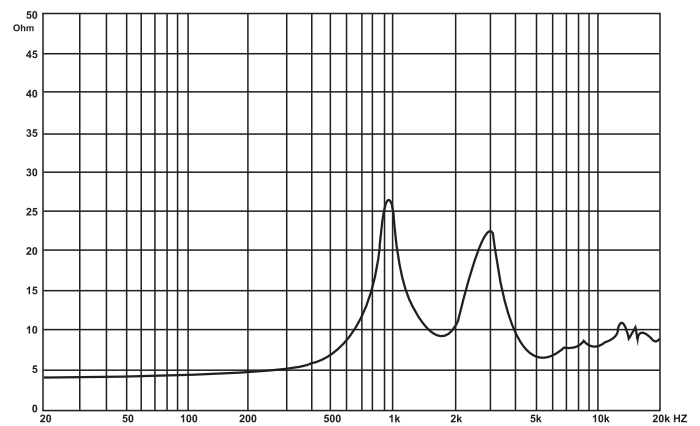

NOTE:

(1) 2 Hours Test According to AES 2–1984 Rev. 2003

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.