

SF-4507A

1.7 in COMPRESSION DRIVER



KEY FEATURES

60W continuous program power capacity .

1" horn throat diameter.

44.5mm(1.7 in) aluminium voice coil.

Polymer diaphragm.

1000–18000 Hz response.

98 dB sensitivity





SPECIFICATIONS

Nominal Impedance	8 Ω
Minimum Impedance	6 Ω
Power handling(AES)	60 W
Sensitivity @1w/1m	98dB
Throat Diameter	25.4mm(1 in)
Frequency Range	1—18KHz
Recommended crossover	2.2KHZ
Voice Coil Diameter	44.5mm (1.7in)
Winding Material	Aluminium
Diaphragm Material	Polymer
Flux Density	1.85T $\pm$ 0.1T
Magnet Material	Ceramic Ring
Overall Diameter	120mm
Overall Depth	63mm
Net Weight (1 unit)	1.9Kg

MOUNTING AND SHIPPING INFORMATION

Mounting Holes	P76 x M6 x 2
Overall Diameter	115 mm
Depth	63 mm
Net Weight (1 unit)	1.9 kg
Shipping Weight (8 units)	16 kg
Shipping Box (8 units)	300x280x160 mm

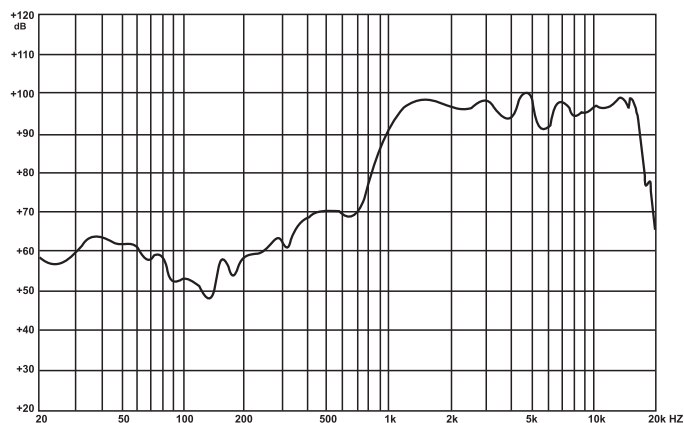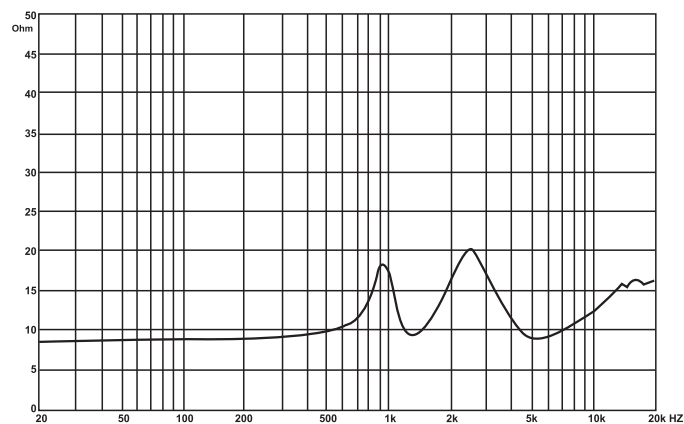

NOTE:

(1) 2 Hours Test According to AES 2–1984 Rev. 2003

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.